


Timing Pulleys - HTD 5M Type (Solid type with Pilot Bore)

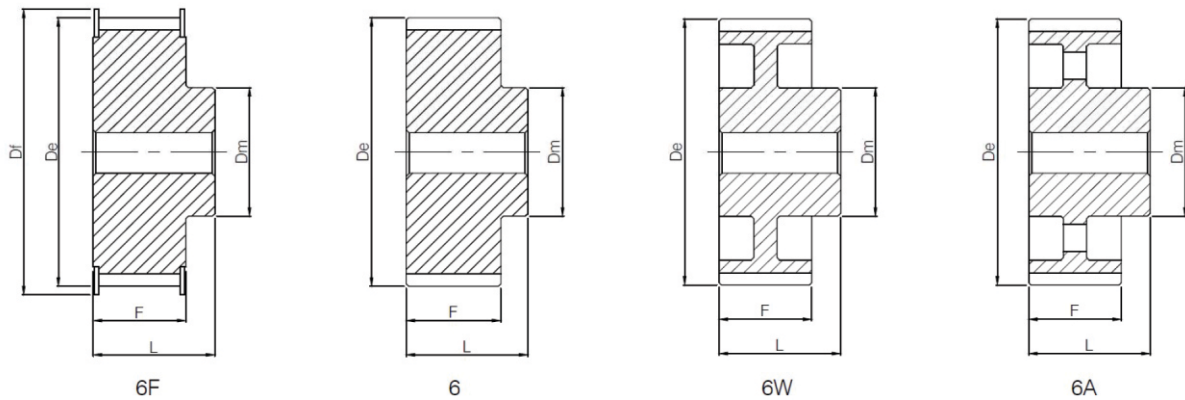

HTD 5M 09 - Pitch 5mm -for Belt Width 9mm

FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
STEEL	WITH FLANGES	12-5M-09	6F	12	19,1	17,96	23	13	14,5	20	4	0,028
		14-5M-09	6F	14	22,28	21,14	25	14	14,5	20	6	0,040
		15-5M-09	6F	15	23,87	22,73	28	16	14,5	20	6	0,050
		16-5M-09	6F	16	25,46	24,32	28	16,5	14,5	20	6	0,050
		18-5M-09	6F	18	28,65	27,51	32	20	14,5	20	6	0,070
		20-5M-09	6F	20	31,83	30,69	36	23	14,5	22,5	6	0,100
		21-5M-09	6F	21	33,42	32,28	38	24	14,5	22,5	6	0,110
		22-5M-09	6F	22	35,01	33,87	38	25,5	14,5	22,5	6	0,120
		24-5M-09	6F	24	38,20	37,06	42	27	14,5	22,5	6	0,140
		26-5M-09	6F	26	41,38	40,24	44	30	14,5	22,5	6	0,170
		28-5M-09	6F	28	44,56	43,42	48	30,5	14,5	22,5	6	0,200
		30-5M-09	6F	30	47,75	46,60	51	35	14,5	22,5	6	0,240
		32-5M-09	6F	32	50,93	49,79	54	38	14,5	22,5	8	0,270
36-5M-09	6F	36	57,30	56,16	60	38	14,5	22,5	8	0,330		
40-5M-09	6F	40	63,66	62,52	71	38	14,5	22,5	8	0,400		
ALUMINIUM	WITHOUT FLANGES	44-5M-09	6	44	70,03	68,89	-	50	14,5	25,5	8	0,210
		48-5M-09	6	48	76,39	75,25	-	50	14,5	25,5	8	0,240
		60-5M-09	6W	60	95,49	94,35	-	50	14,5	25,5	8	0,220
		72-5M-09	6W	72	114,59	113,45	-	50	14,5	25,5	8	0,260
		80-5M-09	6A	80	127,32	126,18	-	62	14,5	25,5	12	0,300
		90-5M-09	6A	90	143,24	142,10	-	62	14,5	25,5	12	0,350
		112-5M-09	6A	112	178,25	177,11	-	62	14,5	25,5	12	0,440

*All dimensions are in mm.

**We reserve the right to alter the specifications & dimensions without any prior notice.

Timing Pulleys - HTD 5M Type (Solid type with Pilot Bore)

HTD 5M 15 - Pitch 5mm -for Belt Width 15mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
STEEL	WITH FLANGES	12-5M-15	6F	12	19,1	17,96	23	13	20,5	26	4	0,040
		14-5M-15	6F	14	22,28	21,14	25	14	20,5	26	6	0,050
		15-5M-15	6F	15	23,87	22,73	28	16	20,5	26	6	0,060
		16-5M-15	6F	16	25,46	24,32	28	16,5	20,5	26	6	0,070
		18-5M-15	6F	18	28,65	27,51	32	20	20,5	26	6	0,090
		20-5M-15	6F	20	31,83	30,69	36	23	20,5	26	6	0,120
		21-5M-15	6F	21	33,42	32,28	38	24	20,5	26	6	0,130
		22-5M-15	6F	22	35,01	33,87	38	25,5	20,5	26	6	0,140
		24-5M-15	6F	24	38,20	37,06	42	27	20,5	28	6	0,180
		26-5M-15	6F	26	41,38	40,24	44	30	20,5	28	6	0,220
		28-5M-15	6F	28	44,56	43,42	48	30,5	20,5	28	6	0,250
		30-5M-15	6F	30	47,75	46,60	51	35	20,5	28	6	0,300
		32-5M-15	6F	32	50,93	49,79	54	38	20,5	28	8	0,350
		36-5M-15	6F	36	57,30	56,16	60	38	20,5	28	8	0,430
40-5M-15	6F	40	63,66	62,52	71	38	20,5	28	8	0,520		
ALUMINIUM	WITHOUT FLANGES	44-5M-15	6	44	70,03	68,89	-	50	20,5	30	8	0,270
		48-5M-15	6	48	76,39	75,25	-	50	20,5	30	8	0,310
		60-5M-15	6W	60	95,49	94,35	-	50	20,5	30	8	0,300
		72-5M-15	6W	72	114,59	113,45	-	50	20,5	30	8	0,380
		80-5M-15	6A	80	127,32	126,18	-	62	20,5	30	12	0,420
		90-5M-15	6A	90	143,24	142,10	-	62	20,5	30	12	0,460
		112-5M-15	6A	112	178,25	177,11	-	62	20,5	30	12	0,610
HTD 5M 25 - Pitch 5mm -for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
STEEL	WITH FLANGES	12-5M-25	6F	12	19,1	17,96	23	13	30	36	4	0,050
		14-5M-25	6F	14	22,28	21,14	25	14	30	36	6	0,070
		15-5M-25	6F	15	23,87	22,73	28	16	30	36	6	0,080
		16-5M-25	6F	16	25,46	24,32	28	16,5	30	36	6	0,100
		18-5M-25	6F	18	28,65	27,51	32	20	30	36	6	0,120
		20-5M-25	6F	20	31,83	30,69	36	23	30	36	6	0,160
		21-5M-25	6F	21	33,42	32,28	38	24	30	38	6	0,190
		22-5M-25	6F	22	35,01	33,87	38	25,5	30	38	6	0,210
		24-5M-25	6F	24	38,20	37,06	42	27	30	38	6	0,250
		26-5M-25	6F	26	41,38	40,24	44	30	30	38	6	0,300
		28-5M-25	6F	28	44,56	43,42	48	30,5	30	38	6	0,350
		30-5M-25	6F	30	47,75	46,60	51	35	30	38	6	0,420
		32-5M-25	6F	32	50,93	49,79	54	38	30	38	8	0,480
		36-5M-25	6F	36	57,30	56,16	60	38	30	38	8	0,590
40-5M-25	6F	40	63,66	62,52	71	38	30	38	8	0,740		
ALUMINIUM	WITHOUT FLANGES	44-5M-25	6	44	70,03	68,89	-	50	30	40	8	0,370
		48-5M-25	6	48	76,39	75,25	-	50	30	40	8	0,430
		60-5M-25	6W	60	95,49	94,35	-	50	30	40	8	0,435
		72-5M-25	6W	72	114,59	113,45	-	50	30	40	8	0,525
		80-5M-25	6A	80	127,32	126,18	-	62	30	40	12	0,550
		90-5M-25	6A	90	143,24	142,10	-	62	30	40	12	0,640
		112-5M-25	6A	112	178,25	177,11	-	62	30	40	12	0,840

*All dimensions are in mm.

**We reserve the right to alter the specifications & dimensions without any prior notice.