


Timing Pulleys - HTD 8M Type (Solid type with Pilot Bore)

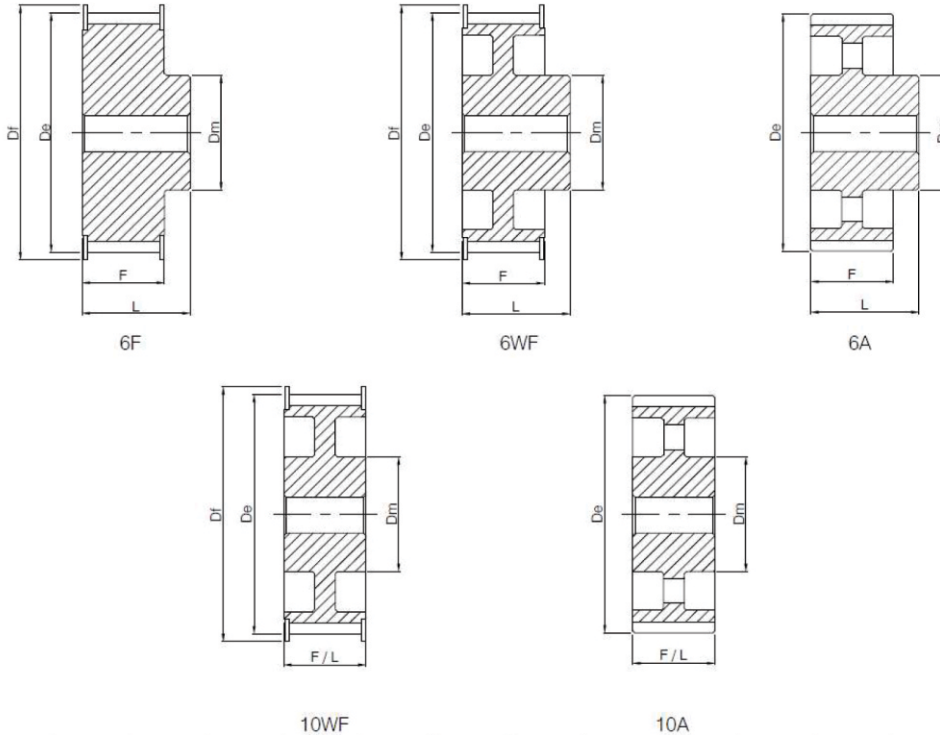

HTD 8M 20 - Pitch 8mm -for Belt Width 20mm)												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)	
STEEL	WITH FLANGES	20-8M-20	6F	20	50,93	49,56	55	39	28	38	12	0,500
		22-8M-20	6F	22	56,02	54,65	60	43	28	38	12	0,540
		24-8M-20	6F	24	61,12	59,75	66	45	28	38	12	0,650
		26-8M-20	6F	26	66,21	64,84	71	50	28	38	12	0,800
		28-8M-20	6F	28	71,30	70,08	75	50	28	38	15	0,870
		30-8M-20	6F	30	76,39	75,13	83	55	28	38	15	1,020
		32-8M-20	6F	32	81,49	80,16	87	60	28	38	15	1,200
		34-8M-20	6F	34	86,58	85,22	91	70	28	38	15	1,400
		36-8M-20	6F	36	91,67	90,30	98,5	70	28	38	15	1,550
		38-8M-20	6F	38	96,77	95,39	103	75	28	38	15	1,750
		40-8M-20	6F	40	101,86	100,49	106	75	28	38	15	1,760
		44-8M-20	6F	44	112,05	110,67	119	75	28	38	15	2,100
		48-8M-20	6F	48	122,23	120,86	127	75	28	38	15	2,440
		56-8M-20	6WF	56	142,60	141,23	148	80	28	38	15	2,550
		CAST IRON	WITHOUT FLANGES	64-8M-20	6WF	64	162,97	161,60	168	80	28	38
72-8M-20	6WF			72	183,35	181,97	192	80	28	38	15	3,540
80-8M-20	6A			80	203,72	202,35	-	90	28	38	15	3,800
90-8M-20	6A			90	229,18	227,81	-	90	28	38	15	4,200
112-8M-20	6A			112	285,21	283,83	-	90	28	38	18	5,200
144-8M-20	6A			144	366,69	365,32	-	90	28	38	20	7,500
		168-8M-20	6A	168	427,81	426,44	-	100	28	38	20	10,000
		192-8M-20	6A	192	488,92	487,55	-	100	28	38	20	14,400

*All dimensions are in mm.

**We reserve the right to alter the specifications & dimensions without any prior notice.

Timing Pulleys -HTD 8M Type (Solid type with Pilot Bore)

HTD 8M 30 - Pitch 8mm -for Belt Width 30mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
STEEL	WITH FLANGES	20-8M-30	6F	20	50,93	49,56	55	39	38	48	12	0,600
		22-8M-30	6F	22	56,02	54,65	60	43	38	48	12	0,690
		24-8M-30	6F	24	61,12	59,75	66	45	38	48	12	0,840
		26-8M-30	6F	26	66,21	64,84	71	50	38	48	12	1,000
		28-8M-30	6F	28	71,30	70,08	75	50	38	48	15	1,120
		30-8M-30	6F	30	76,39	75,13	83	55	38	48	15	1,320
		32-8M-30	6F	32	81,49	80,16	87	60	38	48	15	1,530
		34-8M-30	6F	34	86,58	85,22	91	70	38	48	15	1,800
		36-8M-30	6F	36	91,67	90,30	98,5	70	38	48	15	1,990
		38-8M-30	6F	38	96,77	95,39	103	75	38	48	15	2,270
		40-8M-30	6F	40	101,86	100,49	106	75	38	48	15	2,400
		44-8M-30	6F	44	112,05	110,67	119	75	38	48	15	2,700
		48-8M-30	6F	48	122,23	120,86	127	75	38	48	15	3,200
		56-8M-30	6WF	56	142,60	141,23	148	90	38	48	15	3,700
CAST IRON		64-8M-30	6WF	64	162,97	161,60	168	90	38	48	15	4,100
		72-8M-30	6WF	72	183,35	181,97	192	95	38	48	15	4,800
	WITHOUT FLANGES	80-8M-30	6A	80	203,72	202,35	-	100	38	48	15	5,100
		90-8M-30	6A	90	229,18	227,81	-	100	38	48	15	5,700
		112-8M-30	6A	112	285,21	283,83	-	100	38	48	18	6,800
		144-8M-30	6A	144	366,69	365,32	-	100	38	48	20	9,300
		168-8M-30	6A	168	427,81	426,44	-	100	38	48	20	11,400
192-8M-30	6A	192	488,92	487,55	-	100	38	48	20	16,000		

HTD 8M 50 - Pitch 8mm -for Belt Width 50mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
STEEL	WITH FLANGES	20-8M-50	6F	20	50,93	49,56	55	39	60	70	12	0,900
		22-8M-50	6F	22	56,02	54,65	60	43	60	70	12	1,000
		24-8M-50	6F	24	61,12	59,75	66	45	60	70	12	1,230
		26-8M-50	6F	26	66,21	64,84	71	50	60	70	12	1,500
		28-8M-50	6F	28	71,30	70,08	75	50	60	70	15	1,670
		30-8M-50	6F	30	76,39	75,13	83	55	60	70	15	1,970
		32-8M-50	6F	32	81,49	80,16	87	60	60	70	15	2,270
		34-8M-50	6F	34	86,58	85,22	91	70	60	70	15	2,640
		36-8M-50	6F	36	91,67	90,30	98,5	70	60	70	15	2,970
		38-8M-50	6F	38	96,77	95,39	103	75	60	70	15	3,350
		40-8M-50	6F	40	101,86	100,49	106	75	60	70	18	3,500
		44-8M-50	6F	44	112,05	110,67	119	75	60	70	18	4,050
		48-8M-50	6F	48	122,23	120,86	127	75	60	70	18	4,800
		56-8M-50	10WF	56	142,60	141,23	148	90	60	60	18	5,200
CAST IRON		64-8M-50	10WF	64	162,97	161,60	168	100	60	60	18	5,600
		72-8M-50	10WF	72	183,35	181,97	192	100	60	60	18	6,800
	WITHOUT FLANGES	80-8M-50	10A	80	203,72	202,35	-	110	60	60	18	6,900
		90-8M-50	10A	90	229,18	227,81	-	110	60	60	18	8,600
		112-8M-50	10A	112	285,21	283,83	-	110	60	60	18	9,600
		144-8M-50	10A	144	366,69	365,32	-	110	60	60	20	13,800
		168-8M-50	10A	168	427,81	426,44	-	120	60	60	20	16,000
192-8M-50	10A	192	488,92	487,55	-	130	60	60	20	22,800		

*All dimensions are in mm.

**We reserve the right to alter the specifications & dimensions without any prior notice.