


## Timing Pulleys - AT 5 Type (Solid type with Pilot Bore)

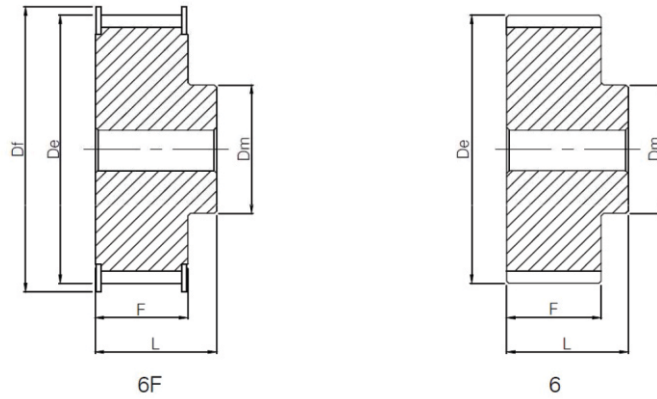

AT 5 - Pitch 5mm -for Belt Width 10mm

FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
ALUMINIUM	WITH FLANGES	21AT5/12-2	6F	12	19,1	18,25	23	11	15	21	-	0,020
		21AT5/14-2	6F	14	22,28	21,45	25	14	15	21	-	0,020
		21AT5/15-2	6F	15	23,87	23,05	28	16	15	21	6	0,030
		21AT5/16-2	6F	16	25,46	24,60	32	18	15	21	6	0,030
		21AT5/18-2	6F	18	28,65	27,80	32	20	15	21	6	0,030
		21AT5/19-2	6F	19	30,24	29,40	36	22	15	21	6	0,040
		21AT5/20-2	6F	20	31,83	31,00	36	23	15	21	6	0,040
		21AT5/22-2	6F	22	35,01	34,25	38	24	15	21	6	0,050
		21AT5/24-2	6F	24	38,2	37,40	42	26	15	21	6	0,060
		21AT5/25-2	6F	25	39,79	39,00	44	26	15	21	6	0,060
		21AT5/26-2	6F	26	41,38	40,60	44	26	15	21	6	0,060
		21AT5/27-2	6F	27	42,97	42,20	48	30	15	21	8	0,070
		21AT5/28-2	6F	28	44,56	43,75	48	32	15	21	8	0,070
		21AT5/30-2	6F	30	47,75	46,95	51	34	15	21	8	0,080
		21AT5/32-2	6F	32	50,93	50,10	55	38	15	21	8	0,090
		21AT5/36-2	6F	36	57,3	56,45	60	38	15	21	8	0,120
		21AT5/40-2	6F	40	63,66	62,85	66	40	15	21	8	0,140
		21AT5/42-2	6F	42	66,85	66,00	71	40	15	21	8	0,180
	WITHOUT FLANGES	21AT5/44-0	6	44	70,03	69,20	-	45	15	21	8	0,190
		21AT5/48-0	6	48	76,39	75,55	-	50	15	21	8	0,200
21AT5/60-0		6	60	95,49	94,65	-	65	15	21	8	0,310	

\*All dimensions are in mm.

\*\*We reserve the right to alter the specifications & dimensions without any prior notice.

## Timing Pulleys - AT 5 (Solid type with Pilot Bore)

AT 5 - Pitch 5mm -for Belt Width 16mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
ALUMINIUM	WITH FLANGES	27AT5/12-2	6F	12	19,1	18,25	23	11	21	27	-	0,020
		27AT5/14-2	6F	14	22,28	21,45	25	14	21	27	-	0,030
		27AT5/15-2	6F	15	23,87	23,05	28	16	21	27	6	0,030
		27AT5/16-2	6F	16	25,46	24,60	32	18	21	27	6	0,040
		27AT5/18-2	6F	18	28,65	27,80	32	20	21	27	6	0,050
		27AT5/19-2	6F	19	30,24	29,40	36	22	21	27	6	0,050
		27AT5/20-2	6F	20	31,83	31,00	36	23	21	27	6	0,050
		27AT5/22-2	6F	22	35,01	34,25	38	24	21	27	6	0,060
		27AT5/24-2	6F	24	38,2	37,40	42	26	21	27	6	0,080
		27AT5/25-2	6F	25	39,79	39,00	44	26	21	27	6	0,080
		27AT5/26-2	6F	26	41,38	40,60	44	26	21	27	6	0,090
		27AT5/27-2	6F	27	42,97	42,20	48	30	21	27	8	0,090
		27AT5/28-2	6F	28	44,56	43,75	48	32	21	27	8	0,090
		27AT5/30-2	6F	30	47,75	46,95	51	34	21	27	8	0,110
		27AT5/32-2	6F	32	50,93	50,10	55	38	21	27	8	0,130
		27AT5/36-2	6F	36	57,3	56,45	60	38	21	27	8	0,160
		27AT5/40-2	6F	40	63,66	62,85	66	40	21	27	8	0,190
		27AT5/42-2	6F	42	66,85	66,00	71	40	21	27	8	0,210
	WITHOUT FLANGES	27AT5/44-0	6	44	70,03	69,20	-	45	21	27	8	0,230
		27AT5/48-0	6	48	76,39	75,55	-	50	21	27	8	0,280
27AT5/60-0		6	60	95,49	94,65	-	65	21	27	8	0,430	

AT 5 - Pitch 5mm -for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)
ALUMINIUM	WITH FLANGES	36AT5/12-2	6F	12	19,1	18,25	23	11	30	36	-	0,030
		36AT5/14-2	6F	14	22,28	21,45	25	14	30	36	-	0,040
		36AT5/15-2	6F	15	23,87	23,05	28	16	30	36	6	0,040
		36AT5/16-2	6F	16	25,46	24,60	32	18	30	36	6	0,045
		36AT5/18-2	6F	18	28,65	27,80	32	20	30	36	6	0,060
		36AT5/19-2	6F	19	30,24	29,40	36	22	30	36	6	0,070
		36AT5/20-2	6F	20	31,83	31,00	36	23	30	36	6	0,080
		36AT5/22-2	6F	22	35,01	34,25	38	24	30	36	6	0,080
		36AT5/24-2	6F	24	38,2	37,40	42	26	30	36	6	0,110
		36AT5/25-2	6F	25	39,79	39,00	44	26	30	36	6	0,120
		36AT5/26-2	6F	26	41,38	40,60	44	26	30	36	6	0,120
		36AT5/27-2	6F	27	42,97	42,20	48	30	30	36	8	0,130
		36AT5/28-2	6F	28	44,56	43,75	48	32	30	36	8	0,130
		36AT5/30-2	6F	30	47,75	46,95	51	34	30	36	8	0,150
		36AT5/32-2	6F	32	50,93	50,10	55	38	30	36	8	0,180
		36AT5/36-2	6F	36	57,3	56,45	60	38	30	36	8	0,230
		36AT5/40-2	6F	40	63,66	62,85	66	40	30	36	8	0,280
		36AT5/42-2	6F	42	66,85	66,00	71	40	30	36	8	0,290
	WITHOUT FLANGES	36AT5/44-0	6	44	70,03	69,20	-	45	30	36	8	0,320
		36AT5/48-0	6	48	76,39	75,55	-	50	30	36	8	0,400
36AT5/60-0		6	60	95,49	94,65	-	65	30	36	8	0,620	

\*All dimensions are in mm.

\*\*We reserve the right to alter the specifications & dimensions without any prior notice.