


Timing Pulleys -XL Type (Solid type with Pilot Bore)

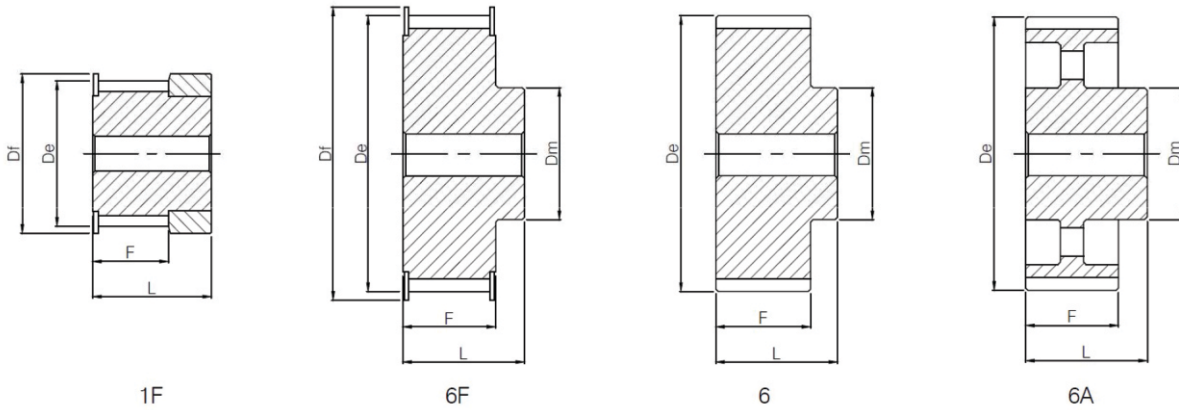

XL 037 - Pitch 1 / 5" (5,08 mm) -for Belt Width 3/8" (9,5 mm)												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	STOCK BORE	WEIGHT (Kgs)	
ALUMINIUM	10XL037	1F	10	16,17	15,66	23	-	13	19,8	4,0	0,010	
	11XL037	1F	11	17,79	17,28	23	-	13	19,8	4,0	0,015	
	12XL037	1F	12	19,40	18,90	25	-	13	19,8	4,0	0,020	
	14XL037	6F	14	22,64	22,13	28	14,3	14,3	19,8	6,0	0,015	
	15XL037	6F	15	24,26	23,75	28	15,9	14,3	19,8	6,0	0,015	
	16XL037	6F	16	25,87	25,36	32	17,5	14,3	19,8	6,0	0,020	
	18XL037	6F	18	29,11	28,60	36	20,6	14,3	19,8	6,0	0,030	
	20XL037	6F	20	32,34	31,83	38	23,8	14,3	22,2	6,0	0,040	
	21XL037	6F	21	33,96	33,45	38	23,8	14,3	22,2	6,0	0,045	
	22XL037	6F	22	35,57	35,07	42	25,4	14,3	22,2	6,0	0,045	
	24XL037	6F	24	38,81	38,30	44	27,0	14,3	22,2	6,0	0,060	
	26XL037	6F	26	42,04	41,53	48	30,0	14,3	22,2	6,0	0,065	
	28XL037	6F	28	45,28	44,77	51	30,2	14,3	22,2	6,0	0,080	
	30XL037	6F	30	48,51	48,00	54	34,9	14,3	22,2	6,0	0,095	
	32XL037	6	32	51,74	51,24	-	38,0	14,3	25,4	8,0	0,110	
	36XL037	6	36	58,21	57,70	-	38,0	14,3	25,4	8,0	0,130	
	40XL037	6	40	64,68	64,17	-	38,0	14,3	25,4	8,0	0,150	
	42XL037	6	42	67,91	67,41	-	38,0	14,3	25,4	8,0	0,160	
	44XL037	6	44	71,15	70,64	-	38,0	14,3	25,4	8,0	0,170	
	48XL037	6	48	77,62	77,11	-	38,0	14,3	25,4	8,0	0,210	
	60XL037	6A	60	97,02	96,51	-	38,0	14,3	25,4	8,0	0,200	
	72XL037	6A	72	116,43	115,92	-	38,0	14,3	25,4	8,0	0,220	

*All dimensions are in mm.

**We reserve the right to alter the specifications & dimensions without any prior notice.